
## BWT besthead



# The Innovator

### FILTER HEAD WITH VERSATILE CONNECTION TECHNOLOGY

The new BWT besthead FLEX filter head fits all BWT water+more filter cartridges, making it very simple to optimise water at the point of use. The filter head's user-friendly venting is extraordinarily simple to operate, while the bypass control that snaps into place ensures the right setting is made. With its one-of-a-kind FLEX Insert interface, no tools are required to integrate water filters with matching connecting hoses into existing supply line systems. FLEX Insert attachments in various formats can be used, thanks to the socket that is adjustable in 30° steps. This ensures the space-saving installation of filters and safe supply line routing with no kinks. BWT besthead FLEX features two DVGW-compliant backflow prevention devices. These stop water from flowing back into the drinking water pipeline or filter cartridge while also preventing any accidental leaks. Both the filter head and its accessories are pressure-resistant and safe. Made from food-grade materials, they can be utilised in any drinking water system worldwide.

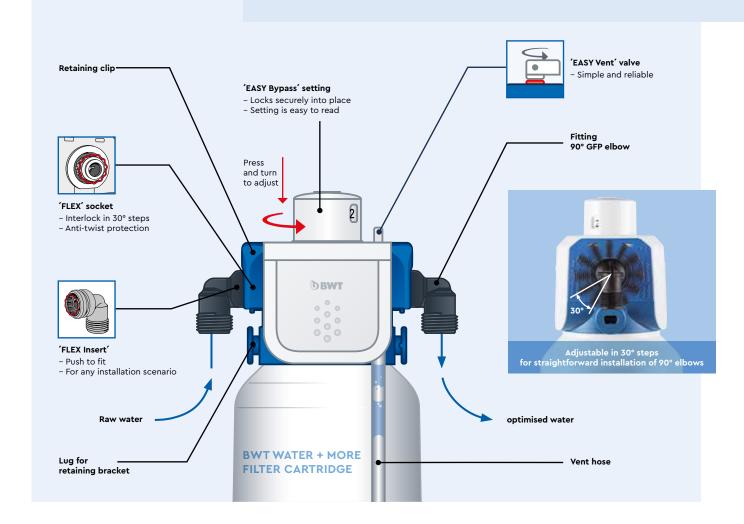







#### **TECHNICAL DATA**

| Dimensions                |            |
|---------------------------|------------|
| Width in mm               | 125        |
| Height in mm              | 105        |
| filter head order no. (1) | FS00Z20A00 |

 $^{(1)}$  Supplied with 2x 90° elbow fittings, FLEX Insert with 3/8" ext. thread made from GFP. Subject to change.

#### **OPERATING CONDITIONS**

Inlet pressure: 2–8 bar Water temperature: 4–30 °C Ambient temperature: 4–40 °C

BWT besthead FLEX filter head with a wide choice of connection options to ensure simple, space-saving installation of BWT water+more filter cartridges.

#### **ACCESSORIES**

|   | Order number |
|---|--------------|
| Straight fitting  |              |
| Straight fitting, FLEX Insert with 3/8" ext. thread made from GFP   | FS00Z21A00   |
| Straight fitting, FLEX Insert with ½" ext. thread made from GFP   | FS00Z22A00   |
| Straight fitting, FLEX Insert with ¾" ext. thread made from GFP   | FS00Z23A00   |
| Straight fitting, FLEX Insert with 8 mm John Guest connector made from GFP  | FS00Z24A00   |
| Straight fitting, FLEX Insert with 3/8" John Guest connector made from GFP  | FS00Z25A00   |
| 90° elbow fittings  |              |
| 90° elbow fitting, FLEX Insert with ¾" ext. thread made from GFP  | FS00Z26A00   |
| 90° elbow fitting, FLEX Insert with ½" ext. thread made from GFP  | FS00Z27A00   |
| 90° elbow fitting, FLEX Insert with ¾" ext. thread made from GFP  | FS00Z28A00   |
| 90° elbow fitting, FLEX Insert with 6 mm John Guest connector made from GFP   | FS00Z41A00   |
| 90° elbow fitting, FLEX Insert with 8 mm John Guest connector made from GFP   | FS00Z29A00   |
| 90° elbow fitting, FLEX Insert with ¼ mm John Guest connector made from GFP   | FS00Z42A00   |
| Connecting hoses with straight connection   |              |
| Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, union nut with 3%" int. thread   | FS00Z36A00   |
| Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, union nut with ½" int. thread  | FS00Z37A00   |
| Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, union nut with ¾" int. thread  | FS00Z38A00   |
| Connecting hose DN 8, 1.5 m, straight FLEX Insert made from GFP, 90° elbow with ¾" int. thread  | 125252207    |
| Connecting hoses with 90° connection  |              |
| Connecting hose DN 8, 1.5 m, 90° elbow FLEX Insert made from GFP, union nut with ¾" int. thread   | FS00Z32A00   |
| Connecting hose DN 8, 1.5 m, 90° elbow FLEX Insert made from GFP, union nut with ½" int. thread   | FS00Z33A00   |
| Connecting hose DN 8, 1.5 m, 90° elbow FLEX Insert made from GFP, union nut with ¾" int. thread   | FS00Z34A00   |
| Connecting hose DN 8, 1.5 m, with ball valve, 90° elbow FLEX Insert made from GFP, union nut with ¾" int. thread  | FS00Z35A00   |
| Connectors  |              |
| Tee, 2x FLEX Connector, 1x FLEX Insert, made from GFP   | FS00Z40A00   |
| Mounting brackets   |              |
| Retaining bracket for under-sink mounting   | FS00Y66A00   |
| Extension to retaining bracket for wall-mounting 2XL size filter cartridges   | FS00Y73A00   |
| BWT besthead FLEX – Set 1   |              |
| - BWT besthead FLEX with 2x 90° elbow fittings, FLEX Insert with ¾" ext. thread made from GFP - Connecting hose DN 8, 1.5 m, with ball valve, 90° elbow FLEX Insert made from GFP, union nut with ¾" int. thread - Straight fitting, FLEX Insert with ¾" ext. thread made from GFP - Reduction FM ¾" x M ¾" made from GFP | FS00Z39A00   |

#### MANUFACTURER:

BWT water + more GmbH Walter-Simmer-Str. 4 A-5310 Mondsee

#### SALES:

BWT water+more Deutschland: info@water-and-more.de · Tel.: +49 (0)611 58019-0

BWT water + more Austria: kundenservice.wm@bwt-group.com · Tel.: +43 (0)6232 5011-1164

BWT Aqua AG Schweiz: info@bwt-aqua.ch · Tel.: +41 (0)61 7558899

